



EASY TO INSTALL



SLEEK DESIGN

Attractive appearance, simple and elegant



MECHANICAL

Dimension (W/H/D) 500/1652/300mm

Weight 45KG


CERTIFICATION

Certificate CE

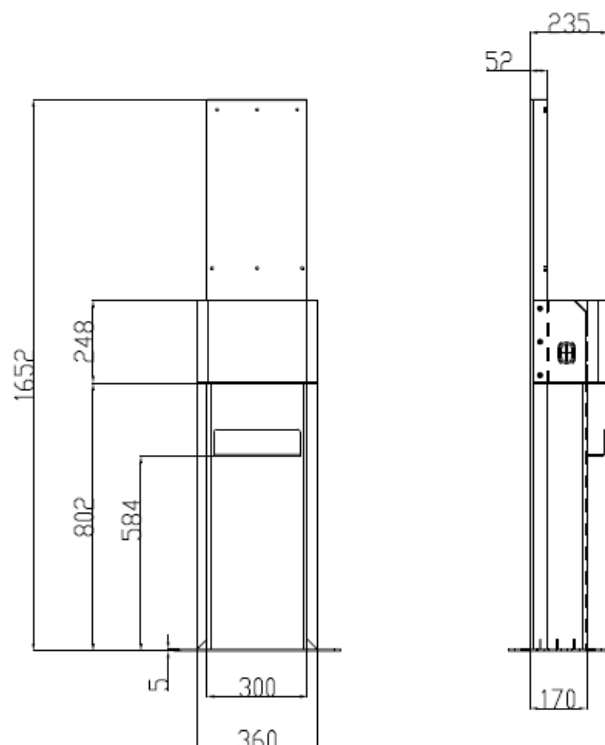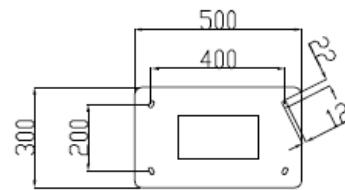

INPUT & OUTPUT

Input voltage	AC230-415V
Frequency	45-65HZ
DC plug type	CCS Type II
Output voltage range	250-750V DC
Output current	0-33.3A/0-60A/per phase
Voltage accuracy	≤±1%
Current-regulating accuracy	≤±1%
Metering accuracy	0.5%
Current accuracy	≥30A ≤ ± 1% ; < 30A: ≤ ±0.3A
Voltage-regulating accuracy	≤±0.5%
Ripple coefficient	≤±1%
Efficiency	≥95.2%
Connection	DC Gun *1

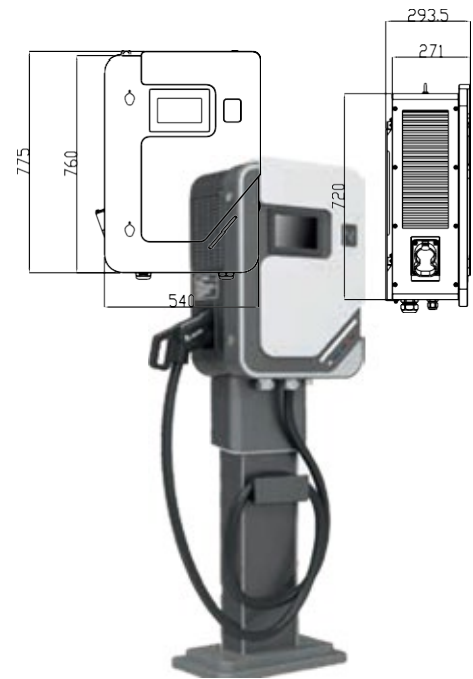

PROTECTION

Over voltage protection	Yes
Under voltage protection	Yes
Overload protection	Yes
Leakage current protection	Yes
Overtemperature protection	Yes
Under temperature protection	Yes
Surge protection	Yes

FUNCTION & ACCESSORY

Ethernet/WIFI/4G	Yes/Opt/Opt
Display	7 inch touch screen
Indicator	Yes
Payment support	RFID/QR(standard)
Emergency stop	Yes
Cable Length	4m
RFID	Yes
Load Balancing distance	>15m (3PHM)

WORKING ENVIRONMENT

Protection degree	IP54
Environment temperature	-20°C ~ +65°C
Relative humidity	0-95% non-condensing
Maximum altitude	<2000m
Cooling	Forced air cooling
Standby power	<25W
Noise emission	≤65db

